Air Cleaner Test Report

Applicant : NCCO Global Limited

Address : Block B, 2/F, Goodwill Industrial Building, No. 36-44 Pak Tin Par

Street, Tsuen Wan, New Territories, Hong Kong

Application Number : KJ2005003 - 05

Report Number : REPAP20061501

Report Issue Date : 12 Jun 2020

Total Page : 8 Pages (including this page)

This document is issued by the Company under its General Conditions of Service printed overleaf. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any older of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30days only. This document cannot be reproduced except in full, without prior approval of the Company.

TABLE OF CONTENT

1.	Sample Description	3	
2.	Detail Description of the sample	4	
3.	Testing Environment	5	
4.	Testing Method of Removal Efficiency	6	
5.	Result of Removal Efficiency	7 - 8	

Acron International Technology Limited

IAQ Contractor, IAQ Control Facilities Supplier, IAQ Consultant Subsidiary company of the Hong Kong University of Science and Technology under the Entrepreneurship Program

Page 2 of 8 Report No.: REPAP20061501

1. Sample Description

Product : Air Cleaner

Brand Name : Westinghouse

Model No. : NCCO1701

No. of Sample Received : 1

Test Date : 27 May 2020 – 27 May 2020

Test Item(s) : Pollutants Removal Efficiency

Test Requested : Benzene

Test Reference(s) : In-house method SOP200 (for VOC removal rate)

Test Equipment : Honeywell instrument ppbRAE 3000

Equipment no. : E002 - 001

Test Result : See the attached sheets

Remark : N/A

2. Detail Description of the sample





Westinghouse/ NCCO1701



NCCO Reactor NA213020300 and Activated Carbon HEPA

Acron International Technology Limited


3. Testing Environment

Temperature : 26.2°C

Relative Humidity : 39%

Testing Chamber : 1m³ Testing Chamber

Size (W × H × D) mm : $1000 \times 1000 \times 1000$

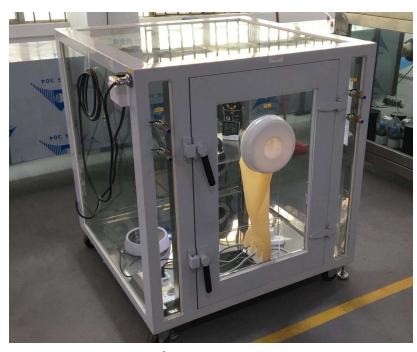

1m³ Testing Chamber

Acron International Technology Limited
Your Technical Companion
HKUST Entrepreneur

4. Testing Method of Removal Efficiency

In a 1m³ chamber, chemical was injected into the chamber by a syringe and evaporated by a hot plate. Internal circulation was turned on throughout the test to ensure the uniformity of chemical concentration inside the chamber. Initial concentration (C₀) of the chemical was recorded before switching on the air cleaner with a range of 100 (±10) mg/m³. Then, the air cleaner is switched on for 60 minutes and the chemical concentration was recorded as C₆₀, the final

concentration of chemical.

The test was repeated without the air cleaner to determine the natural decay of the chemical at the test chamber. Chemical was injected into the chamber by a syringe and evaporated by a hot plate with an initial concentration (C_{N0}). The final concentration (C_{N60}) was determined 60 minutes later

New filters and HEPA have been used for each chemical test.

Acron International Technology Limited

Report No.: REPAP20061501

5. Results of Removal Efficiency

Brand/ Model No.	Operation Mode	Test Chemical	Volume of use (mL)
Westinghouse/	CC	Benzene	0.52
NCCO1701	SS	Delizelle	0.32

Initial Concentration	Natural Decay, kn	Total Decay, ke	Removal Efficiency	
mg/m^3	(min ⁻¹)	(min ⁻¹)	(%)	
106.30	0.001	0.051	99.0	

Remark: Initial concentration is set within 100±10mg/m³.

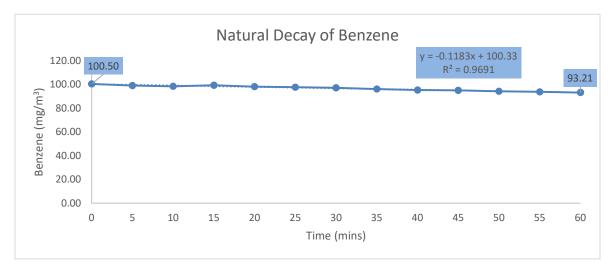


Figure a. Natural Decay of Benzene

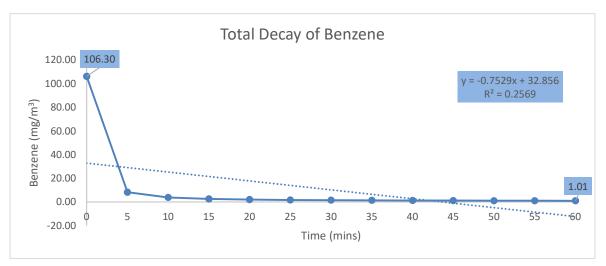


Figure b. Total Decay of Benzene

Calculation:

$$A_{1} = \cfrac{C_{0} - C_{60}}{C_{0}}$$

$$A_{2} = \cfrac{C_{N0} - C_{N60}}{C_{N0}}$$

$$C_{0}(1 - A_{2}) - C_{60}$$
 Removal Efficiency =
$$\cfrac{C_{0}(1 - A_{2})}{C_{0}(1 - A_{2})}$$

A₁: Removal rate (%)

A₂: Natural decay rate (%)

C: Concentration of testing subject (mg/m³)

*** End of Report ***

Acron International Technology Limited